

# UTG2000B Series Arbitrary Waveform Generators



## Introduction

UTG2000B series can produce high precision, stable, pure and low distortion signals; provide high frequency square wave with quick rise and fall edges. Users can improve their working efficiency by using the multifunctional instrument of easy operated interface, competitive specifications and humanized graphical display.

## Features

- ▶ 60/80/120MHz sine waveform output, 1μHz full-band resolution;
- ▶ 320MSa/s sample rate, 16 bits vertical resolution;
- ▶ Unique Expression Output Function
- ▶ Standard dual channels, supporting stand-alone or channel-coupling output mode;
- ▶ 16Mpts arbitrary waveform length
- ▶ Versatile modulation choices: AM, FM, PM, PWM, ASK, FSK, PSK, BPSK, QPSK, OSK, DSB-AM, SUM, QAM
- ▶ 4.3 Inches TFT LCD,WVGA (800×480);
- ▶ Standard Ports: USB Host, USB Device, LAN

## Application features

CH1 Limit HighZ  $\sim$  CH2 Limit HighZ OFF Wave

Freq 120.000,00 MHz  
Amp 4.000,0 Vpp  
Offset 0 mV  
Phase 360.00 °

Sine Square Ramp Pulse Arb Noise

120MHz sine waveform output, Double Channel and Multiple Waveform Selection

CH1 Limit 50 Ω  $\sim$  CH2 Limit HighZ OFF Type

ArbSel

- Triang.bsv [195]
- TukeyWin.bsv [196]
- Versiera.bsv [197]
- Voice.bsv [198]
- Weibull.bsv [199]

40/40

Param

Built-in up to 200 arbitrary waveforms

CH1 Limit 50 Ω  $\sim$  CH2 Limit 50 Ω OFF Type

Exp Satrt -1.400,000,00  
Exp End 1.400,000,00  
 $(x-1)*x*(x+1)$

1/2

Param

Exp Satrt Exp End Exp Str Freq Amp Offset

Built-in 16 harmonic generator

CH1 Limit 50 Ω NCyc CH2 Limit 50 Ω NCyc CH1 Setting


CH2 Setting

Channel Coupling


Counter

Output Inversion SYNC Output Load CH1 Add CH Copy

Channel merging and stacking

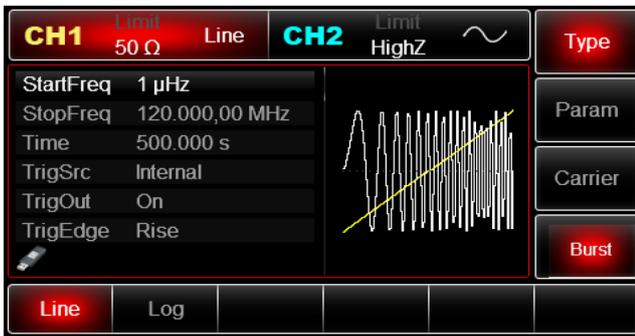

Sweep function and burst mode

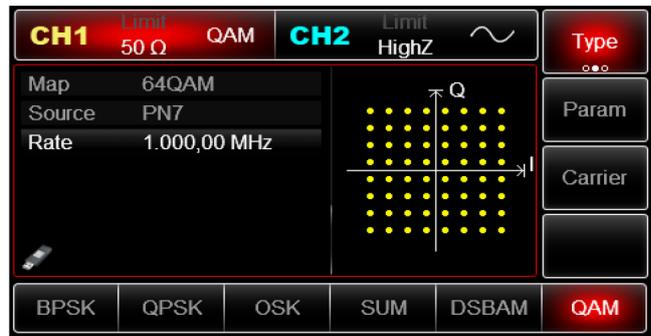

Multiple Analog and Digital Modulation

**Technical Specifications**

Model	UTG2062B	UTG2082B	UTG2122B
Channel	Dual channel		
Max Frequency	60MHz	80MHz	120MHz
Sampling Rate	1.28GSa/s (320MSa/s ,4 times interpolation)		
Waveform	Sine, Square, Ramp, Burst, Noise, DC, Arbitrary, Harmonic, Expression		
Working Modes	Output gating, Continuous, Modulation, Frequency sweep, Burst		
Modulation Types	AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, OSK, SUM, DSB-AM, QAM, PWM		
<b>Frequency Characteristic</b>			
<b>Sine Wave</b>			
Frequency Range	1μHz~60MHz	1uHz~80MHz	1uHz~120MHz
Resolution	1μHz		
Accuracy	within 90 days ±50ppm,within 1 year±100ppm (18°C~28°C)		
Harmonic Distortion	Test Condition: output frequency 0dBm		
(Typical)	DC~1MHz	-60dBc	
	1MHz ~10MHz	-55dBc	
	10MHz ~40MHz	-50dBc	
	40MHz ~80MHz	-45dBc	
	80MHz ~120MHz	-40dBc	
THD (Typical)	<0.2%(DC~20kHz,1Vpp)		
Spurious Signal	Typical (0dBm)		
(Non-harmonic)	DC~10MHz, <-70dBc		
	> 10MHz: <-70dBc+6dB/ octave		
Phase Noise(Typical)	10 MHz: ≤-125 dBc/Hz(typical,0dBm,10kHz deviation)		
<b>Square Wave</b>			
Frequency Range	1μHz~25MHz	1μHz~25MHz	1μHz~30MHz
Resolution	1μHz		
Rise/Fall time	<4ns(Typical,1kHz,1Vpp)		
Overshoot	<2% (Typical)		
Duty Ratio	0.001%~99.999%		
Symmetry	1% of period + 4ns		
(Duty Ratio=50%)			
Jitter	Typical(1MHz,1Vpp,50Ω)		
	≤5MHz: 2ppm + 200ps		
	>5MHz: 200ps		
<b>Ramp Wave</b>			
Frequency	1μHz~3MHz	1μHz~4MHz	1μHz~5MHz
Resolution	1μHz		
Nonlinearity	< 1% of peak output(Typical,1kHz,1Vpp ,symmetry 100%)		
Symmetry	0.0% ~ 100.0%		
<b>Pulse Wave</b>			
Frequency	1μHz~20MHz	1μHz~25MHz	1μHz~30MHz
Resolution	1μHz		
Pulse Width	≥16ns		
Variable Edge	9ns~10s	8ns~10s	7ns~10s
Overshoot	<2% (Typical 1Vpp)		
Jitter	150ps		

<b>Gauss noise</b>			
Bandwidth	60MHz(-3dB)(Typical)	80MHz(-3dB)(Typical)	60MHz(-3dB)(Typical)
<b>DC Offset</b>			
Range(Peak AC+DC)	±5V(50Ω) ±10V (High Resistance)		
Offset Accuracy	±(1%+2mV)		
<b>Arbitrary Wave</b>			
Frequency	1μHz~15MHz	1μHz~20MHz	1μHz~25MHz
Resolution	1μHz		
Max. Wave Length	8pts~16Mpts		
Vertical Resolution	16bits(Symbol included)		
Sampling Rate	1.28GS/s(Interpolation),320MS/s (DDS mode)		
Rising/Falling Time (Typical)	< 7ns	< 6ns	< 5ns
Jitter	150ps (Play Mode)		
Nonvolatile Storage	160 waves		
<b>Output</b>			
Amplitude	≤20MHz: 1mVpp~10Vpp;(50Ω) ≤60MHz: 1mVpp~5Vpp;(50Ω) ≤120MHz: 1mVpp~2Vpp;(50Ω)		
Accuracy (1kHz sine wave)	±(1% of set value+1mVpp)		
Amplitude Flatness (Equal to 1kHz sine wave, 1Vpp/50Ω)	Test Condition: Typical (Sine Wave,2.0Vpp) ≤10MHz: ±0.1dB ≤60MHz: ±0.2dB ≤80MHz: ±0.4dB ≤120MHz: ±0.8dB		
<b>waveform Output</b>			
Impedance	50Ω (Typical)		
Insulation	Maximum 42Vpk to ground wire		
Protection	Channel Protection		
<b>Modulation Types</b>			
<b>AM</b>			
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave		
Source	Internal/External		
Modulation Wave	Sine Wave, Square Wave, Ramp Wave, Noise, Arbitrary Wave		
Modulation Frequency	2mHz~1MHz		
Modulation Depth	0%~120%		
<b>FM</b>			
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave		
Source	Internal/External		
Modulation Wave	Sine Wave, Square Wave, Ramp Wave, Noise, Arbitrary Wave		
Modulation Frequency	2mHz~1MHz		
Frequency Deviation	DC ~30MHz	DC ~40MHz	DC ~60MHz
<b>PM</b>			
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave		
Source	Internal/External		
Modulation Wave	Sine Wave, Square Wave, Ramp Wave, Noise, Arbitrary Wave		
Modulation Frequency	2mHz~1MHz		
Phase Deviation	0°~360°		
<b>ASK</b>			
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave		
Source	Internal/External		
Modulation Wave	Square Wave (Duty ratio 50%)		
Modulation Frequency	2mHz~1MHz		
<b>FSK</b>			
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave		
Source	Internal/External		
Modulation Wave	Square Wave (Duty Ratio 50%)		
Modulation Frequency	2mHz~1MHz		
<b>BPSK</b>			
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave		

Source	Internal/External
Modulation Wave	Square Wave (Duty Ratio 50%)
Modulation Frequency	2mHz~1MHz
<b>QPSK</b>	
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave
Source	PN7,PN9,PN11,PN15,PN17,PN21,PN23,PN25
Modulation Wave	Square Wave (Duty Ratio 50%)
Modulation Frequency	2mHz ~ 1MHz
<b>OSK</b>	
Carrier Wave	Sine Wave
Source	Internal/External
Oscillation Time	8ns~200s
Keying Frequency	2mHz ~ 1MHz
<b>SUM</b>	
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Noise Wave, Arbitrary Wave
Source	Internal/External
Modulation Wave	Sine Wave, Square Wave, Ramp Wave, Noise Wave, Arbitrary Wave
Modulation Frequency	2mHz ~ 1MHz (Internal); DC ~ 20kHz (External)
<b>QAM</b>	
QAM Mode	QAM4,QAM8,QAM16,QAM32,QAM64,QAM128,QAM256(Built-in constellation modulation)
Modulation Source	PN7,PN9,PN11,PN15,PN17,PN21,PN23,PN25
Chip Rate	2mHz~1MHz
Amplitude	10mVpp~10Vpp(50Ω)
<b>PWM</b>	
Carrier Wave	Pulse
Source	Internal/External
Modulation Wave	Sine Wave, Square Wave, Ramp Wave, Noise, Arbitrary Wave
Modulation Frequency	2mHz ~ 1MHz
Width Deviation	0%~49.99% of pulse width
<b>Frequency Sweep</b>	
Carrier Wave	Sine Wave, Square Wave, Ramp Wave, Arbitrary Wave
Type	Linear or Logarithmic
Frequency Sweep Time	1ms ~ 500s ± 0.1%
Trigger Source	Manual, External or Internal
<b>Burst</b>	
Waveform	Sine Wave, Square Wave, Ramp Wave, Noise, Arbitrary Wave
Type	Count(1~1,000,000 periods), infinite, gated
Start/Stop Phase	0° ~ + 360°
Internal Cycle	1μs ~ 500 s ± 1%
Gated Source	External trigger
Trigger Source	Manual, External or Internal
<b>Sync Signal</b>	
Output Level	TTL
Output Frequency	1μHz~10MHz
Output Frequency	50Ω (Typical)
Coupled Mode	DC
<b>Rear Panel Connector</b>	
External Analog Modulation Input	±5Vpk of full range > 5kΩ input impedance
10MHz Input/Output Frequency	10MHz±50Hz
10MHz Input/Output Level	TTL
10MHz Input/Output Impedance	10kΩ(Input)、50Ω(Output) (Typical)
Locking Time	< 1s(Typical)
External trigger	TTL
<b>Trigger Input</b>	
Input Level	TTL compatible
Slope	Rising or Falling, Optional
Pulse Width	> 100 ns
Input Impedance	> 10kΩ,DC coupling
Response Time	Frequency Sweep: < 500μs(Typical) Pulse Train: < 500ns(Typical)

<b>Trigger output</b>		
Level	TTL Compatible	
Pulse Width	> 400ns(Typical)	
Output Impedance	50Ω(Typical)	
Maximum Frequency	1MHz	
<b>Frequency Meter</b>		
Input Level	TTL Compatible	
Range of Input Frequency	100mHz~200MHz	
Accuracy	±51ppm	
Frequency Resolution	6 digit/s	
Coupled Mode	DC	
<b>General Technical Specifications</b>		
<b>Display</b>		
LCD	4.3 inches TFT	
Resolution	480×272	
<b>Power Supply</b>		
Power Supply	100~240 VAC,45~440Hz,CAT II	
Power Consumption	Less than 50W	
Fuse	2A,Class T,250V	
<b>Environment</b>		
Temperature Range	Operating: 10°C~+40°C Non-operating: -20°C~+60°C	
Cooling Method	Forced fan cooling	
Humidity Range	Below +35°C: ≤90% relative humidity +35°C ~+40°C: ≤60%relative humidity	
Altitude	Operating below 2,000m°C Non-operating below 15,000m	
<b>Mechanical Specification</b>		
Dimensions(W×H×D)	305mm×230mm×93mm	
Net Weight	3.10 kg	
Rough Weight	4.10 kg	
<b>Ordering Information</b>		
UTG2000B Series	UTG2122B(120MHz, 320MSa/s, 16Mpts, 2-Channel )	UTG2122B
	UTG2082B(80MHz, 320MSa/s, 16Mpts, 2-Channel )	UTG2082B
	UTG2062B(60MHz, 320MSa/s, 16Mpts, 2-Channel )	UTG2062B
Standard Accessories	Power cord conforming to the standard of the destination country	/
	USB interface cable	/
	2 BNC cables (1M)	/
Optional accessory	Power output module	/